


Specificatii:

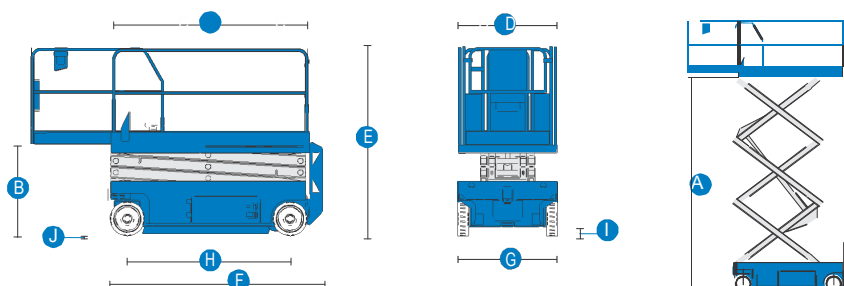

MODELE	GS™-2046	GS™-2646	GS™-3246
DIMENSIUNI	Metric	Metric	Metric
Inaltimea maxima de lucru	8.10 m	9.92 m	11.75 m
A Inaltimea maxima a platformei	6.10 m	7.92 m	9.75 m
B Inaltime platforma – stransa	1.04 m	1.16 m	1.29 m
C Lungime platforma-exterior	2.26 m	2.26 m	2.26 m
extinsa	3.18 m	3.18 m	3.18 m
Puntea extensibila a platformei	91 cm	91 cm	91 cm
D Latimea platformei -exterior	1.15 m	1.15 m	1.15 m
Inaltime grilaj	-	1.09 m	1.09 m
Inaltimea bordurii de protectie	15 cm	15 cm	15 cm
E Inaltime - stransa: grilaj pliabil	2.13 m	2.26 m	2.39 m
grilaj coborat	1.55 m	1.68 m	1.80 m
F Lungime- stransa	2.41 m	2.41 m	2.41 m
- extinsa	3.31 m	3.31 m	3.31 m
G Latime	1.17 m	1.17 m	1.17 m
H Ampatament	1.85 m	1.85 m	1.85 m
I Garda la sol - centru	10 cm	10 cm	10 cm
J -cu barele antirasturnare coborate	1.9 cm	1.9 cm	1.9 cm

PRODUCTIVITATE:

Capacitatea maximă de personal (interior/exterior)	2/2	2/2	2/1
Capacitatea de ridicare	544	454 kg	318 kg
Viteza de deplasare – stransa	3.5 km/h	3.5 km/h	3.5 km/h
Viteza de deplasare - ridicare	0.8 km/h	0.8 km/h	0.8 km/h
Gradeabilitatea – stransa	30	30%	25%
Raza de rotatie – interior	zero	zero	zero
Raza de rotatie - exterior	2.29	2.29 m	2.29 m
Viteza de ridicare/coborare	30 / 33	30 / 38	57 / 35
Comenzi	Proportionale	Proportionale	Proportionale
Propulsie	roti duble fata	roti duble fata	roti duble fata
Discuri multiple frane	roti duble spate	roti duble spate	roti duble spate
Anvelope – solide fara urme	38 x 13 x 28 cm	38 x 13 x 28 cm	38 x 13 x 28 cm

ENERGIE:

Motorizare	24 V (patru baterii 6 V 225 Ah)	24 V (patru baterii 6 V 225 Ah)	24 V (patru baterii 6 V 225 Ah)
Capacitatea sistemului hidraulic	14.2 L	14.2 L	17 L

GREUTATE

	1,974 kg	2,447 kg	2,812 kg
--	----------	----------	----------